

## **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



# INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification 5:		(11) International Publication Number: WO 92/0237
B42D 15/00	A1	(43) International Publication Date: 20 February 1992 (20.02.92
(21) International Application Number: PCT/US (22) International Filing Date: 19 July 1991		patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European ratent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), LU (European patent), NL (European patent), SE (European patent).
(30) Priority data: 558,665 27 July 1990 (27.07.90)	ı	
(71) Applicant: AVERY DENNISON CORPORATI US]; 150 North Orange Grove Boulevard, Pasa 91103 (US).	ON [U dena, C	Published With international search report.


(54) Title: SHIPPING AND RETURN MAILING LABEL

(72) Inventor: O'BRIEN, Sean, R.; 578 Coolidge Avenue, Glen Ellyn, IL 60137 (US).

(74) Agents: ROSE, Alan, C. et al.; Poms, Smith, Lande & Rose, 2121 Avenue of the Stars, Suite 1400, Los Angeles,

CA 90067 (US).





#### (57) Abstract

A shipping and return mailing label shown in fig. 5 includes three parts: 1) a shipping label (58), 2) a return label (62), and 3) an intermediate card (54) connected to the two labels by lines of perforations, with the front face of all the parts of the label assembly being exposed as the label assembly is mounted on a backing sheet (52), so that, for example, bar codes may be directly printed on each of the three parts. The return label (62) is coated with adhesive (68) on its rear side, the card (54) may be free of adhesive, and the shipping label (58) may be of greater extent than the return label and the card, and may have stripes of adhesive located on its three free edges, so that the entire assembly, following printing, may be folded in a Z-shaped manner, and secured to a carton (34) to be shipped, see figs. 2, 3, and 4. Following receipt of the carton, the customer may remove the shipping label along perforation lines which are provided, and have access to the card for instructions, or to use it as a return postcard, thereby exposing the return label (62), so that the goods may be shipped back to the original shipper, if desired.

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<sup>+</sup> It is not yet known for which States of the former Soviet Union any designation of the Soviet Union has effect.

10

15

20

25

30

35

9

#### SHIPPING AND RETURN MAILING LABEL

#### Field of the Invention

This invention relates to special Shipping and Return Mailing Labels, which may also include additional printed information such as instructions, or a return postcard.

#### Background of the Invention

It has previously been proposed to use multiple layer forms for shipping and return mailing labels, with a return postcard in an intermediate layer. However, when bar code information is to be applied to more than one of the laminates, it was found that bar codes are not easily or accurately imprinted through carbons or NCR type multiple copy processes.

Accordingly, a principal object of the present invention is to provide a multiple shipping and return label assembly, with an included card for instructions or a return postcard, which is simple and convenient to use, and wherein the bar code information may be directly imprinted on the multiple parts of the assembly.

### Summary of the Invention

In accordance with an illustrative embodiment of the invention, a single sheet of card stock is formed into a shipping label, a return label, and an additional card mounted between the two labels and having perforations between the card and the labels, are mounted on a backing sheet with their front surfaces exposed to directly receive printed information which may include a bar code and address information. The return label may be coated with pressure-sencitive adhesive, and the mailing label is slightly greater in extent than the card and the return label, and has adhesive on its free edge and the upper and lower extending edges; so that following imprinting, the label

10

15

20

25

30

35

may be removed from the backing sheet and Z-folded to form a three-layer laminate with the mailing label exposed, the card in the middle, and the return label underneath.

In accordance with other collateral aspects of the invention:

- (1) the return label may be fully coated with pressure-sensitive adhesive;
- (2) the assembly may be formed of 7 to 10 point card stock, 0.007 to 0.010 inch thick;
- (3) the backing sheet may be a continuous sheet with pin holes for feeding or advancing the label assemblies; or the backing sheet(s) could be adapted for feeding through a laser printer;
  - (4) the card may be a return postcard or may contain other information, relating to returns, for example:
  - (5) the three parts of the label assembly may each be imprinted with bar codes; and
  - (6) the mailing label may be provided with perforations along three edges thereof, immediately inside the peripheral adhesive, to facilitate access to the card, and exposure of the mailing label.

In accordance with another aspect of the invention, a multiple layer label assembly includes a first label having pressure-sensitive adhesive on the rear surface thereof; an intermediate sheet secured by a line of perforations to the first label; and a second label secured by a line of perforations to the intermediate sheet, with the second label being of greater height and length than both the first label and the intermediate sheet, and having stripes of pressuresensitive adhesive along the free edges thereof on the back side thereof. Information may be directly printed on the front of the two labels and the intermediate The two labels may be Z-folded to form a threelayer laminate with the first label directly adhered to the surface, the intermediate sheet being above the

10

20

25

30

1

first label, and the second label on top secured to the surface by the stripes of adhesive, and completely covering and enclosing the intermediate sheet.

Other objects, features, and advantages of the invention will become apparent from a consideration of the following detailed description and the accompanying drawings.

### Brief Description of the Drawings

Figure 1 is a schematic showing of a label assembly illustrating the principles of the present invention;

Figure 2 shows the first step in the application of the label assembly shown in Fig. 1 to a carton for shipping;

Figure 3 shows the second step in the application of the label assembly to the carton, with the intermediate card being folded over the return label;

Figure 4 shows the final step in the application of the label assembly to the carton, with the mailing label being folded over the card and the return label, and being secured by adhesive stripes extending along the three edges of the outer shipping label;

Figure 5 shows two representative label assemblies and the backing sheet upon which the label assemblies are affixed or mounted;

Figure 6 is a cross-sectional view to a reduced scale, taken along lines 6-6 of Fig. 5;

Figure 7 shows the Z-shaped configuration of the label assembly as it is removed from the backing sheet and is about to be applied to the carton or other surface; and

Figure 8 shows the step of removing the intermediate card, following removal of the perforated section of the shipping label, leaving the return label exposed.

10

15

20

25

30

35

# Detailed Description of Preferred Embodiments

Referring more particularly to the drawings, Fig. 1 is a schematic perspective view of a label illustrating the principles of the present invention. More particularly, the assembly of Fig. 1 includes a label 12 for shipping a product, such as a carton, to customers, a card 14 which may be a return postcard, or a card giving merchandise return information, and a return mailing label 16 which may be employed to return the carton package to the shipper. The three portions of the label assembly, 12, 14, and 16, are separated from one another by perforation lines 18 and 20. entire assembly is mounted on a backing sheet 22, which may be provided with the usual release coating, so that the label assembly, including parts 12, 14, and 16, will only lightly adhere to the backing sheet, and will not be permanently secured thereto.

The return label 16 may have a full coating of pressure-sensitive adhesive on its lower surface, facing The card 14 has no adhesive on the backing sheet 20. The shipping label 12 is of either surface thereof. slightly greater extent than the label 16 and the card 14, and has adhesive along its three free edges, as indicated at reference numeral 24, 26, and 28. portion of the shipping label which is coated with is separated from the remainder of the shipping label by the perforations 30. Incidentally, in Fig. 1 the size of the shipping label 12 is not to scale, as it should have somewhat greater width than is shown, so that when folded, it will cover the folded combination of portions 14 and 16 of the assembly, as shown hereinbelow.

Figure 2 illustrates the first step in applying the label assembly 12, 14, 16 to a carton 34 which is to be shipped. First, the label assembly is peeled off from the backing sheet 22 and the return label 16 is firmly adhered to the carton 34 in view of

WO 92/02371 PCT/US91/05106

5

10

15

20

25

30

35

the layer of pressure-sensitive adhesive on the back thereof. Next, the card 14 is folded over along the perforations 18, with basic shipping label 12 not yet in engagement with the carton 34. Then, as shown in Fig. 4, the shipping label 12 is folded across the card 14 and the underlying label 16, along perforations 20, and the three overlapping edges of the label 12 are adhered to the carton 34 by pressing the three stripes of adhesive located on the free edges of the shipping label 12 against the carton 34.

Figure 5 shows a complete assembly including a backing sheet 52 with two label assemblies 54 and 56 The label assembly 54 includes the secured thereto. shipping label 58, the information card 60, and the return label 62. Label assembly 54 is adhered to the backing sheet by a full coating of adhesive on the back of the return label 62, and by the stripes of adhesive along the edges of the shipping label 58 as it would extend beyond the card 60 and the return label 62, when applied to a surface in the manner shown in Fig. 4. Similarly, the label assembly 56 has three similar sections, and adhesive located in the corresponding places. Further, the two label assemblies have lines of perforations in the locations discussed hereinabove in connection with Fig. 1 of the drawings.

Figure 6 of the drawings is a schematic cross-sectional view taken along line 6-6 of Fig. 5. Incidentally, Fig. 6 is drawn to one-half the scale of Fig. 5. More specifically, Fig. 6 shows the label assembly 54 mounted on the backing sheet 52, with the pin holes 64 being visible on the portions of the backing sheet 52 which extend beyond the ends of the label assembly 54. The coating of adhesive 68 between the return label 62 and the backing sheet 64 is shown schematically in Fig. 6, with the thickness the adhesive, as well as the thickness of the label assembly and the backing sheet being greater than they would be in actuality, if Fig. 6 were drawn to scale. It may

ë

5

10

15

20

25

30

35

also be noted that the stripe of adhesive 70 along the extreme outer edge of the shipping label 58 is shown in Fig. 6. Although a space is shown between the card 54 and the backing sheet 52, in actuality, because the adhesive layers are so thin, the card 54 would probably actually rest against the backing sheet 52.

Figure 7 shows schematically the Z-shaped configuration of the label assembly after it has been removed from the backing sheet, and before it has been More specifically, with applied to the carton. reference to Fig. 7, it shows the shipping label 82, the intermediate card 84, and the underlying return address The angled line in Fig. 7 indicates label 86. schematically that the lowermost surface of the return label 86 is coated with pressure-sensitive adhesive, either continuously, or with a substantial portion of its surface being covered with pressure-sensitive adhesive; and the lower surfaces of the three free edges of the shipping label 82 which extend beyond the card 84 and the label 86 also coated with stripes of pressuresensitive adhesive.

Figure 8 shows the return label 86, and the residual edges of the shipping label 82, designated 82', after the main part of the shipping label has been removed along the perforations, and the card 84 which is in the process of being removed from its connection to the underlying return label, along the line of perforations which interconnect these two portions of the shipping assembly.

In conclusion, it is to be understood that the foregoing detailed description and the accompanying drawings relate to preferred illustrative embodiments of the invention. In this regard, it is noted that an intermediate return postcard is shown in Fig. 1, while instructions or information for returning merchandise is included on the intermediate card, in the embodiment of Fig. 5. Various changes and modifications may be made in the disclosed embodiments without departing from the

WO 92/02371 PCT/US91/05106

spirit and scope of the invention. Thus, by way of example and not of limitation, instead of using card stock which is in the order of seven to ten points in weight, or about 0.007 to 0.010 inch in thickness, somewhat lighter or heavier stock could be employed. Concerning the backing sheet material, instead of a continuous pin feed backing sheet, individual or continuous sheets suitable for laser printing may be In addition, instead of using full adhesive coverage on the bottom of the return label and on the stripes around the edges of the shipping label, these pressure-sensitive adhesive areas could be provided with lines or closely spaced dots of adhesive accomplishing substantially the same result. addition, the multiple layer label could be employed for other purposes, such as for providing a game piece or coupon, located between the upper and lower labels. Accordingly, the present invention is not limited to the precise embodiments shown in the drawings and as described hereinabove.

7

20

5

10

15

25

30

35

20

30

35

#### What is claimed is:

- 1. A multiple layer label assembly comprising:
- a first label having pressure-sensitive adhesive on the back surface thereof;
- an intermediate sheet secured by a line of perforations to said first label;
  - a second label secured by a line of perforations to said intermediate sheet, said second label being of greater height and length than said intermediate sheet and said first label and having stripes of pressure-sensitive adhesive extending along the upper and lower edges and the free end, thereof, on the rear side thereof; and
- printed information on the front side of said

  first label, said second label and said intermediate
  sheet;

whereby said two labels and said intermediate sheet may be folded along said lines of perforations and applied to a surface, with the first label fully and directly adhered to the surface, with the second label exposed, and the intermediate sheet mounted between the two labels.

- 2. A label assembly as defined in claim 1
  wherein said pressure-sensitive adhesive is permanent
  pressure-sensitive adhesive.
  - 3. A label assembly as defined in claim 1 wherein said return label has a full coating of adhesive extending over the entire rear surface thereof.
    - 4. A label assembly as defined in claim 1 wherein perforations are provided along three edges of said label immediately within the adhesive.
    - 5. A label assembly as defined in claim 1 further comprising a backing sheet supporting said two

WO 92/02371 PCT/US91/05106

labels and said intermediate sheet side-by-side with one surface of each of said labels and said intermediate sheet being exposed to receive printing.

- 6. A label assembly as defined in claim 5 wherein said backing sheet is a continuous sheet provided with pin holes on the edges thereof for feeding the sheet.
- 7. A label assembly as defined in claim 1
  wherein perforations are provided along three edges of said shipping label immediately within said stripes of adhesive.
- 8. A label assembly as defined in claim 1 wherein said intermediate sheet is a return postcard.
  - 9. A label assembly as defined in claim 1 wherein said intermediate sheet bears merchandise return information.
- 10. A multiple layer label assembly as defined in claim 1 wherein one of said labels is a shipping label bearing the address of the intended recipient and the other label is a return label for returning to the original shipper.


30

5

35

1/3

FIG. 1

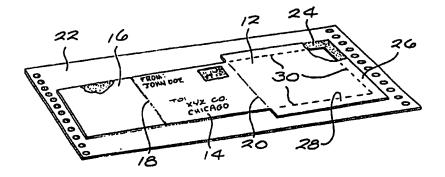




FIG. 2








FIG. 3



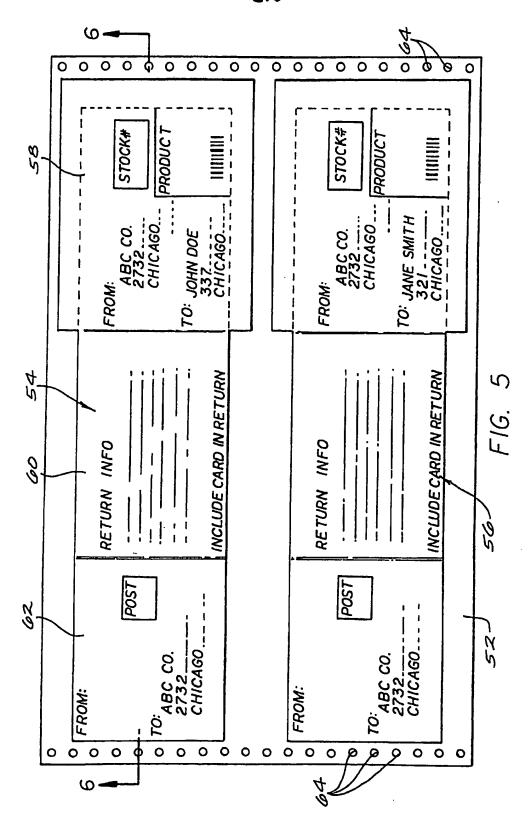



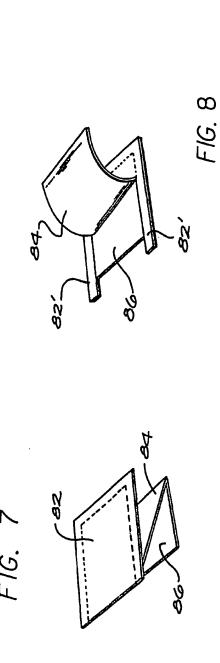

### INTERNATIONAL SEARCH REPORT

International Application No. PCT/TISGI /05106 1. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) \* According to International Palent Classification (IPC) or to both National Classification and IPC IPC(5) B42D 15/00 283/079 US CT. II. FIELDS SEARCHED Minimum Documentation Searched 7 Classification System Classification Symbols US CL 283/062,079,080,081,117 Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched 8 III. DOCUMENTS CONSIDERED TO BE RELEVANT Citation of Document, 11 with indication, where appropriate, of the relevant passages 12 Relevant to Claim No. 15 Category \* P US,A 4,955,640 ANDERSON 11 September 1990 (11.09.90) 1-10 US,A 4,927,179 EHRET 22 May 1990 (22.05.90) A 1-10 US,A 4,708,368 INSTANCE 24 November 1987 (24.11.86) A 1-10 A US,A 4,598,935 STEWART 08 July 1986 (09.07.86) 1-10 US,A 4,272,327 LOGAN 09 June 1981 (09.06.81) A 1-10 A US,A 4,110,502 BAER 29 August 1978 (29.08.78) 1-10 "T later document published after the international filing date or priority data and not in conflict with the application but cited to understand the principle or theory underlying the \* Special categories of cited documents: 19 "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document of particular relevance; the claimed invention cannot be considered to involve as inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. document referring to an oral discissure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family IV. CERTIFICATION Date of Mailing of this International Search Report Date of the Actual Completion of the International Search 10 OCT 1991 20 september 1991 (20.09.91) International Searching Authority Paul A. Bell, Primary Examiner ISA/US